

ORDERING INFORMATION

Mini	Description	P/N	Track(s)	Color	Full-Size	Description	P/N	Track(s)	Color		
	USB Keyboard Emulation	21040109	1 & 2	White		USB Keyboard Emulation	21088066	1, 2 & 3	White		
		21040107	1, 2 & 3	White							
	USB HID	21040105	2	White		Port Powered RS-232	21088061	1, 2 & 3	White		
		21040106	2	Black							
		21040103	1 & 2	White				Keyboard Wedge	21080057	1 & 2 mini DIN	White
		21040104	1 & 2	Black					21080141	1 & 2 mini DIN	Black
		21040101	1, 2 & 3	White							
		21040102	1, 2 & 3	Black							
	Port Powered RS-232	21040075	2	White							
		21040080	2	Black							
		21040071	1 & 2	White							
		21040079	1 & 2	Black							
		21040074	1, 2 & 3	White							
		21040082	1, 2 & 3	Black							
	Keyboard Wedge	21080205	2	White							
		21080206	2	Black							
		21080203	1 & 2	White							
		21080204	1 & 2	Black							
		21080201	1, 2 & 3	White							
		21080202	1, 2 & 3	Black							

SPECIFICATIONS

Mini & Full-Size	Reference Standards	ISO, ANSI, CDL and AAMVA	Mini	USB	Current
	Recording Method	Two-frequency coherent phase (F2F)			Normal: 30 mA Suspend Mode: 300 uA
	Card Speed	3 - 50 i.p.s.		Keyboard Wedge	Current
	MTBF	Electronics: 125,000 hours Head: 1,000,000 passes			20 mA max
	Audible Noise	55db at 39.4 in (1.0 m)		Port Powered RS-232	Power Input
	Temperature	Operating: 32°F - 131°F (0°C - 55°C) Storage: -22°F - 158°F (-30°C - 70°C)			From PC: 5 V
	Humidity	Operating: 10% - 90% non condensing Storage: 0% - 100% non condensing	Mini & Full-Size		Current
	Altitude	Operating: 0 - 10,000 ft (0 - 3,048 m) Storage: 0 - 50,000 ft (1 - 15,240 m)		Keyboard Wedge	Quiescent: 1 - 2 mA typical (continuous) Transmitting: 8 - 9 typical (5 ms duration) Peak at Power On: 12 mA
			Full-Size		DTR Voltage
					5 - 15 VDC
					Current
					100 mA max
					Power Input
					From PC: 5 V, 100 mA max draw

MagTek® Inc.


1710 Apollo Court
Seal Beach, CA 90740
p 562-546-6400
f 562-546-6301

www.magtek.com
800-788-6835

REGISTERED TO ISO 9001:2000

MAGTEK®

COMPLETE CARD READING SOLUTIONS



magtek.com

Mini & Full-Size Swipe Readers




MagTek, the world's leading supplier of magnetic stripe card readers since 1972, offers quality swipe readers designed to help process your business's card transactions easily, effectively and securely.

The Mini Swipe Reader and the Full-Size Swipe Reader, two of our most popular card reading solutions, have been designed to meet a variety of installation needs and functional requirements.

Our Mini Swipe Reader's small foot print saves space while our Full-Size Reader offers the longer card path that ensures easy, accurate swiping every time.

Designed to work with most software applications and PCs, MagTek's Mini and Full-Size Swipe Readers allow for several possible interface configurations to handle the transfer of card data into your system.

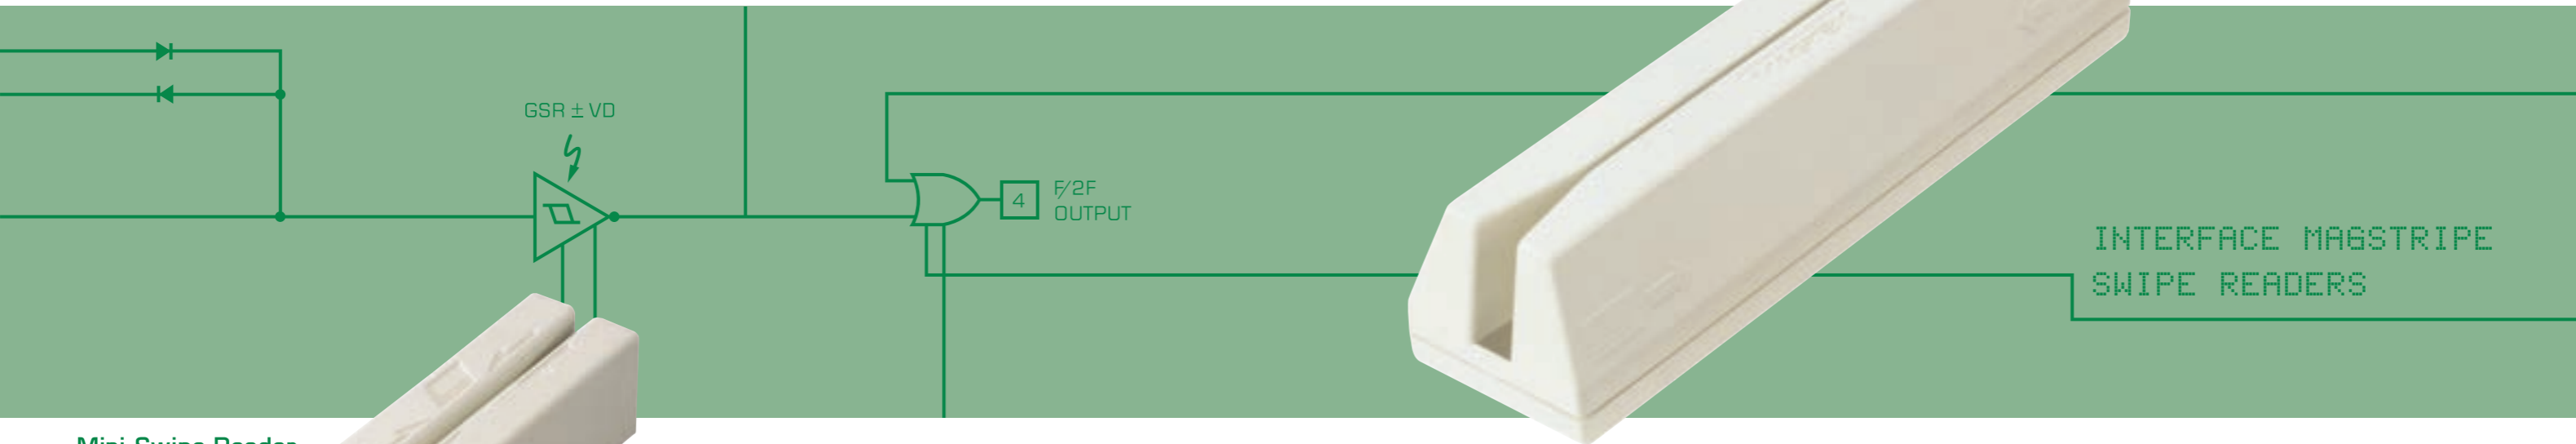

Mini Swipe Reader

Space-saving design



Full-Size Swipe Reader

Longer card path for easy swipe



Features*

- No external power source required
- Reads up to three tracks of data
- Compatible with most computers and terminals
- Reads encoded cards that meet ISO/ANSI/AAMVA standards
- Green/red LED status
- Bidirectional read capability
- Up to 1,000,000 passes with ISO conforming cards
- Available in black or white

* Features apply to both Mini & Full-Size Swipe Readers

USB Keyboard Emulation

- Ideal for existing keyboard wedge applications
- No software interface required to view card data
- Raw data transferred to PC and display on screen as if keyed in manually
- Built-in 6-foot cable with standard USB connector

USB (HID)

[Available for Mini Swipe Reader only]

- Ideal for new card reading applications
- Application software required to display data [demo software available]
- Plugs into PC with minimal setup
- Uses standard window HID driver for communications. No third party device drivers required
- Compliant with Human Interface Device (HID) standards
- Built-in 6-foot cable with standard USB connector

RS-232 (Serial Interface)

- Ideal for applications needing full communication to and from device
- Software interface required to view card data
- Interfaces with existing serial applications
- Standard ASCII message format offers maximum flexibility for application integration
- 9-pin serial connector

Keyboard Wedge

- Ideal for use with PCs that have no available serial port
- No software interface required to view card data
- Transfer of card data via a link between keyboard port and keyboard
- Raw data transferred to your computer and displayed on screen as if keyed in manually
- Available with traditional 6 pin or 5 pin DIN connector