




S410 SEMI RUGGED NOTEBOOK

- 11th Generation Intel® Core™ i7 / i5 vPro™ Processor
- Optional Windows Hello face-authentication camera with IR sensor and fingerprint dual biometric authentication
- Thunderbolt™ 4 brings lightning speed and performance
- Greater flexibility and I / O options
- Wider range of operating temperatures of -29°C ~ 63°C (-20°F ~ 145°F)



Office Dock

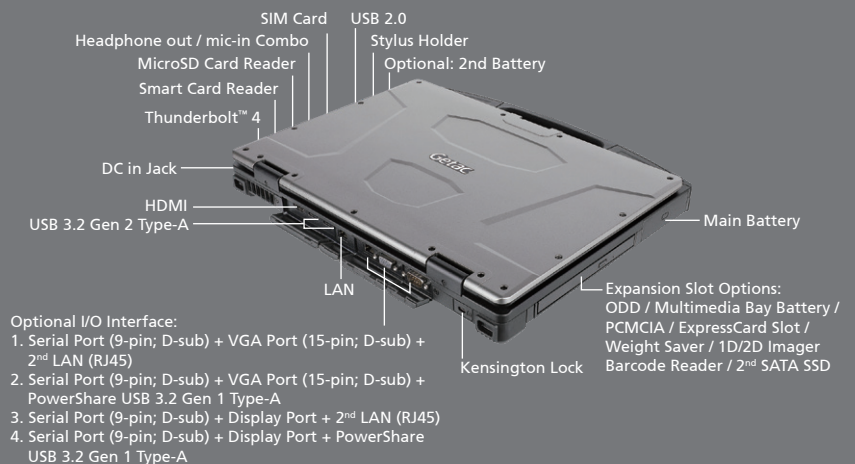

Specifications

Operating System

Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i3-1115G4 Processor
Max. 4.1GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Platform Options:

Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i5-1145G7 vPro™ Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro™ Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® Iris® Xe Graphics (i5 / i7)
Intel® UHD Graphics (i3)

Display

14" TFT LCD HD (1366 x 768)
1000 nits LumiBond® display with Getac sunlight readable technology
Protection Film

Optional: 14" TFT LCD HD (1366 x 768)
1000 nits LumiBond® display with Getac sunlight readable technology and capacitive multi-touch screen

Optional: 14" IPS TFT LCD FHD (1920 x 1080)
1000 nits LumiBond® display with Getac sunlight readable technology and capacitive multi-touch screen

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4
256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD
Optional: Multimedia Bay 2nd Storage: 256GB / 512GB / 1TB SATA SSD¹

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen
- Optional: Capacitive multi-touch screen
Touchpad
- Glide touchpad with multi-touch

Expansion Slot

MicroSD x 1
Optional: Smart Card reader x 1

Multimedia Bay

Weight Saver
Optional: 1D/2D imager barcode readerⁱⁱ
Optional: PCMCIA Type IIⁱⁱⁱ
Optional: ExpressCard34/54^{iv,iii}
Optional: DVD super multi driveⁱ
Optional: Multimedia Bay Battery¹
Optional: Blu-Ray super multi driveⁱ
Optional: Multimedia Bay 2nd Storage¹

I/O Interface

Headphone out/mic-in Combo x 1
DC in Jack x 1
USB 2.0 x 1
USB 3.2 Gen.2 Type-A x 2
Thunderbolt™ 4 x 1
LAN (RJ45) x 1
HDMI x 1
Docking Connector x 1
Optional: FHD Webcam x 1
Optional: SIM Card Slot x 1
Optional: Windows Hello Face-authentication Camera (front-facing) x 1
Optional: RF Antenna Pass-through for GPS, WWAN and WLAN

Configurable I/O Options:

1. Serial Port (9-pin; D-sub) + VGA Port (15-pin; D-sub) + 2nd LAN (RJ45)
2. Serial Port (9-pin; D-sub) + VGA Port (15-pin; D-sub) + PowerShare USB 3.2 Gen 1 Type-A
3. Serial Port (9-pin; D-sub) + Display Port + 2nd LAN (RJ45)
4. Serial Port (9-pin; D-sub) + Display Port + PowerShare USB 3.2 Gen 1 Type-A

Communication Interface

Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.1)^v
Optional: Dedicated GPS^v
Optional: 4G LTE mobile broadband with integrated GPS^v

Security Feature

TPM 2.0
Kensington Lock
Optional: Intel® vPro™ Technology
Optional: HF RFID reader^{ii,iii}
Optional: Fingerprint Reader
Optional: Smart Card Reader
Optional: Windows Hello Face-authentication Camera (front-facing) x 1

Power

AC Adapter (90W, 100-240VAC, 50 / 60Hz)
Li-Ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Optional: AC Adapter (120W, 100-240VAC, 50 / 60Hz)ⁱⁱⁱ
Optional: 2nd Battery (10.8V, typical 6900mAh; min. 6600mAh)
Optional: Multimedia Bay Battery (11.1V, typical 4200mAh; min. 3980mAh)

Dimension (W x D x H) & Weight

350 x 293 x 38.5mm (13.8" x 11.5" x 1.5")
2.38kg (5.25lbs)^x

Rugged Feature

MIL-STD-810H certified
IP53 certified
Splash resistant keyboard
Vibration & 3 feet (0.9m) drop resistant
Sealed ports and connectors
Shock-protected removable SSD

Environmental Specification

Temperature:^x
- Operating: -29°C to 63°C / 20°F to 145°F^x
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Optional: Getac Barcode Manager^{iv}
Optional: Absolute Persistence[®]

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh)
AC Adapter (90W, 100-240VAC, 50 / 60Hz)

Optional:

Carry Bag
2nd Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multimedia Bay Battery (11.1V, typical 4200mAh; min. 3980mAh)ⁱ
Multimedia Bay 2nd SSDⁱ
Multi-Bay Charger (Dual Bay)
Multi-Bay Charger (Eight Bay)
DVD super multi driveⁱ
Blu-Ray super multi driveⁱ
AC Adapter (120W, 100-240V AC)ⁱⁱⁱ
Vehicle Adapter (120W, 11-32VDC)
Capacitive Stylus
Protection Film
Vehicle Dock
Office Dock

- i Trained user swappable.
- ii HF RFID reader and Express Card are mutually exclusive.
- iii Factory option. Not user swappable.
- iv Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- v Dedicated GPS is mutually exclusive with 4G LTE mobile broadband.
- vi Available when barcode reader option is selected.
- vii 13.56MHz Contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- viii 120W AC adapter is used for office dock.
- ix Weight and dimensions vary from configurations and optional accessories.
- x Tested by a national independent third-party test lab following MIL-STD-810H.
- xi For S410 optional DVD Super-Multi Drive, the operating temperature is -10°C to 60°C / 14°F to 140°F.

S410

Semi Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--

Getac

Getac USA

15495 Sand Canyon Ave. Suite 350
Irvine, CA 92618
Tel : 949-681-2900
GetacSales_US@getac.com | www.getac.com/us/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M01Y21US